

Spin On Fuel Filter

DWSOF

(8-03-SOF-005k)




DW Spin On filters are compatible with pump gas, race gas, and ethanol. DW recommends a maximum service interval of 12 months or 12,000 miles. Shorter service intervals are recommended with harsher conditions and corrosive fuels. The DW SOF features dual -10AN O-Ring ports for plumbing flexibility.

- Easily Replaceable Spin On Filter Element
- 1000+ LPH Flow Rate
- Dual 1/8" NPT Fittings for Gauges or Sensors
- 5-10 Micron Filter Rating
- Dual -10AN ORB Inlet and Outlet Fittings
- Included Mounting Bracket

Specifications

Weight (Mount)	20.5 oz (580 grams)	Inlet Ports	-10 AN ORB x2
Weight (Filter)	12.1 oz (344 grams)	Outlet Ports	-10 AN ORB x2
Mount Materials	Anodized T6061 Aluminum	Sensor Ports	1/8-inch NPT x2
Filter Materials	Steel Housing, Paper Element*	Flow Rating (10μ)	1000+ LPH
Micron Rating	5-10 Micron	<i>* Element is E100 Ethanol compatible.</i>	

Testing

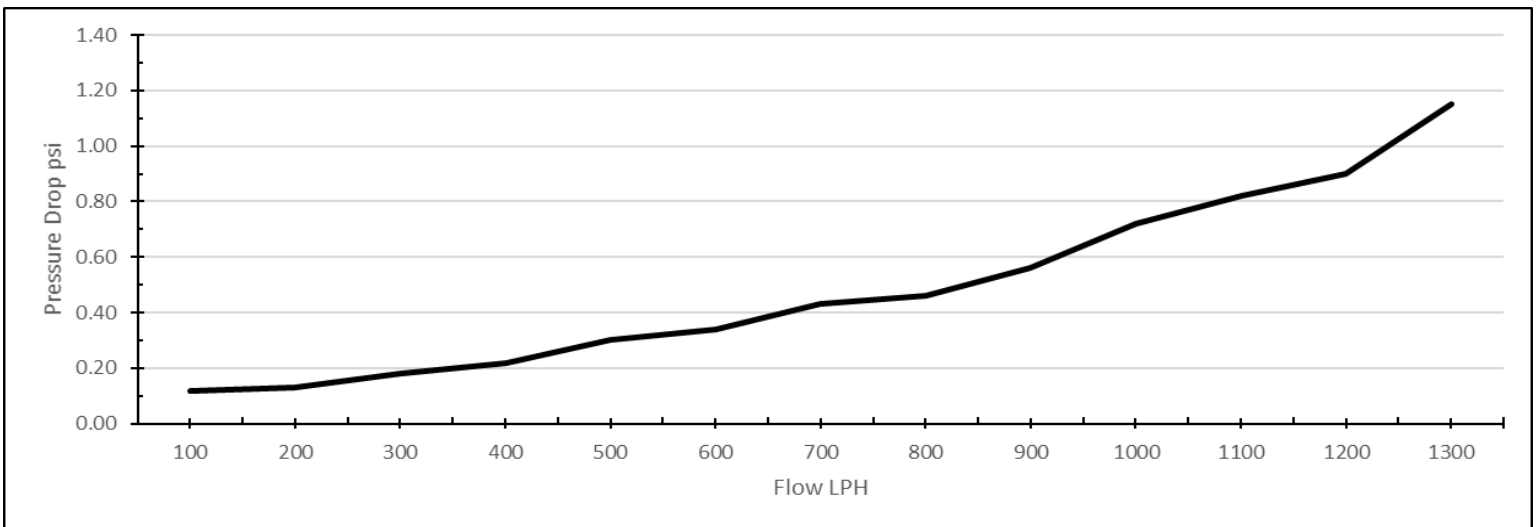

LPH	300	400	500	600	700	800	900	1000	1100
Press Drop	0.18	0.22	0.30	0.34	0.43	0.46	0.56	0.72	0.82

THIS PRODUCT MAY BE USED SOLELY ON VEHICLES USED IN SANCTIONED COMPETITION WHICH MAY NEVER BE USED UPON A PUBLIC ROAD OR HIGHWAY, UNLESS PERMITTED BY SPECIFIC REGULATORY EXEMPTION